





Highlight series: Stabilized Laser References

Calibration sources for all HighFinesse wavelength meters

- Fiber coupled laser output
- Wavelengths: 780 nm, 850 nm, 895 nm, 1532 nm, 1555 nm other wavelengths on request
- Output power (adjustable):
 0 – 3 / 0 – 10 mW @ 1532 & 1555 nm
 0 – 5 mW @ 780, 850 & 895 nm
- Frequency stability and absolute Accuracy: better than ± 2 MHz at constant temperature conditions
- Self (re-)calibration
- Compact design
- Easy to use - „Plug & Play“

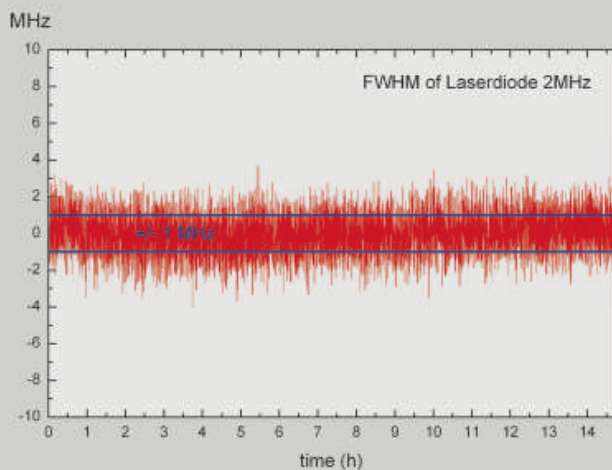

Measurement of the beat signal with a frequency comb over 14 hours

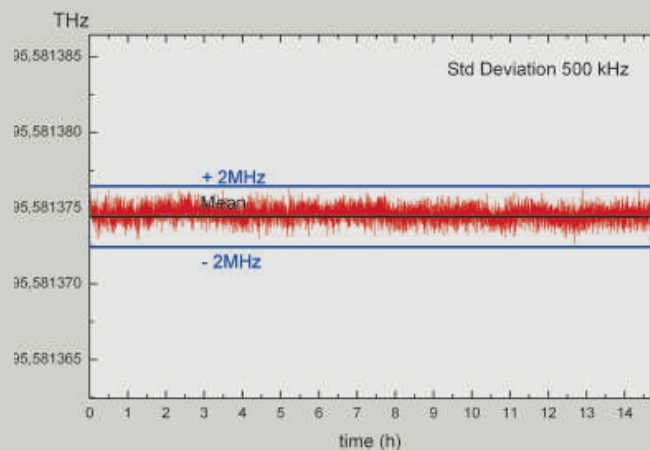

Longterm measurement by WSU IR-I wavelength meter



HighFinesse
 Laser and Electronic Systems

HighFinesse GmbH
 Auf der Morgenstelle 14 D
 72076 Tübingen/Germany

Tel +49 (0) 7071-96 85 15
 Fax +49 (0) 7071-96 85 17
 Email info@highfinesse.com

Additional information
 and distributors:
www.highfinesse.com

HighFinesse calibration sources



Laser Systems Electronics Wavelength Meters
SLR Calibration Sources TS:fast TS:precise

- **Stabilized HeNe Laser @ 632 nm**
SL-02
Suitable for U30 (standard and UV-ranges)
- **Stabilized HeNe Laser @ 632 nm**
SL03 + Isolator
Suitable for U10 (standard and UV-ranges)
- **Stabilized Laser Reference @ 780, 850 & 895 nm**
SLR-780, SLR-850 & SLR-895
Suitable for U10 and U2 (standard and UV-ranges)
- **Stabilized Laser Reference @ 1532 & 1555 nm**
SLR-1532 & SLR-1555
Suitable for WSU IR, WS7 IR, WS7 IR-II, WS6-200 IR-III & LSA IR-III
- **Infrared HeNe Laser @ 3.39 μm**
MIR-HeNe
Suitable for LSA IR-III



HighFinesse
Laser and Electronic Systems

HighFinesse GmbH
Auf der Morgenstelle 14 D
72076 Tübingen/Germany

Tel +49 (0) 7071-96 85 15
Fax +49 (0) 7071-96 85 17
Email info@highfinesse.com

Additional information
and distributors:
www.highfinesse.com